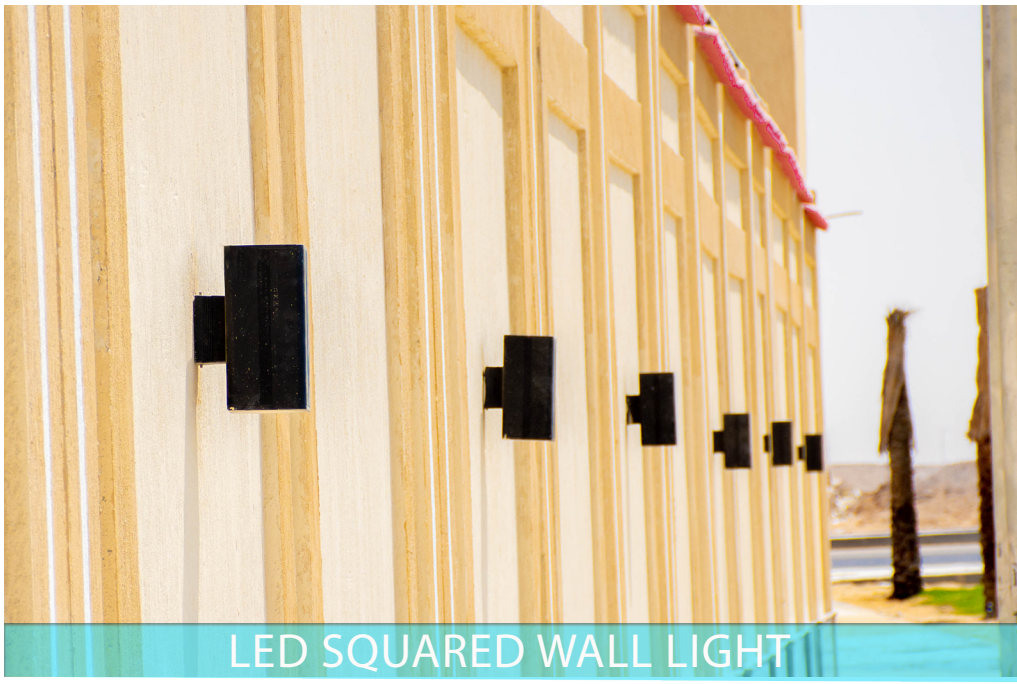

Square Wall Light
wall mounted Up and down light or Down Light ,use with LED COB light, IP65, IK08.
Designed and created for decorative and main lighting for walls.

BODY
Made of Die Cast/Extruded Aluminum electrostatic coated after Phospho-Chromatation.
Segmented specular reflector, Textured glass diffuser.

LEDs
Availability of different power ratings and color temperatures.

Item Code	Item Description	Power (w)	Power Factor	Lumen (lm)	Efficacy (lm/w)	Beam Angle (o)	CRI	CCT (K)	Dimensions (LxSxH)
CSQUR1-COB012230--	LED WALL DOWN LIGHT SQUARED 100° SPREAD 12W 3000k IP65	12	0.965	1122	98	100	83.7	3000	135*53*238
CSQUR2-COB012230--	LED WALL DOWN LIGHT SQUARED 100° SPREAD 12W 3000k IP65	12	0.965	1101	98	35	84.3	3000	135*53*238
CSQUDR1-COB024230--	LED WALL UP DOWN LIGHT SQUARED 100° SPREAD 24W 3000K IP65	24	0.965	2241	98	230	83.6	3000	135*53*300
CSQUDR2-COB024230--	LED WALL UP DOWN LIGHT SQUARED 100° SPREAD 24W 3000K IP65	24	0.965	2166	98	208	84.3	3000	135*53*300

Dimensional Drawing

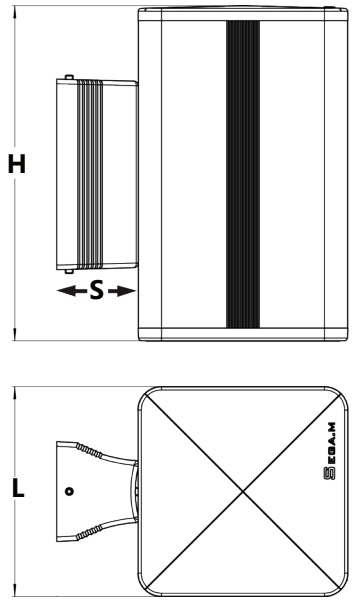

Install Guide

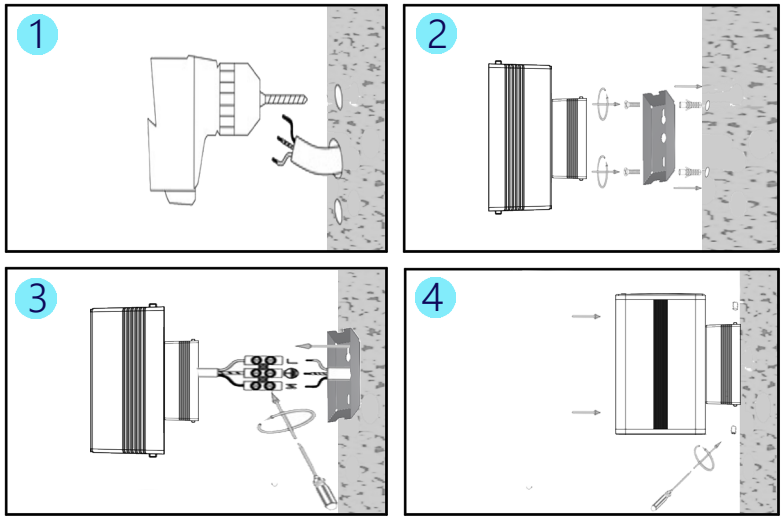

Photometric Data



12W REFLECTOR R1

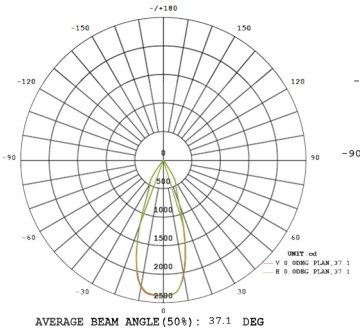

12W REFLECTOR R2

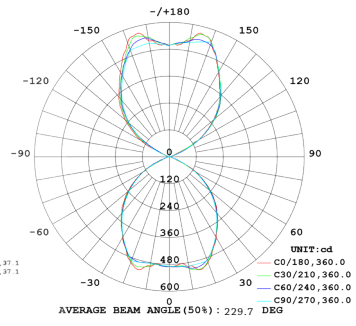

24W REFLECTOR R1



24W REFLECTOR R2
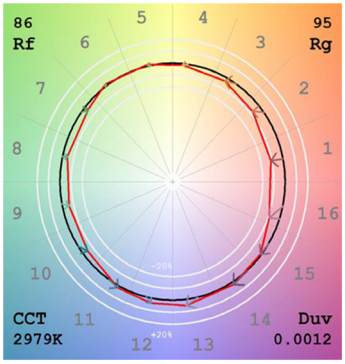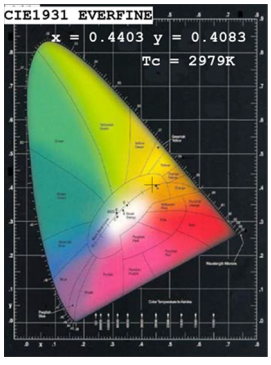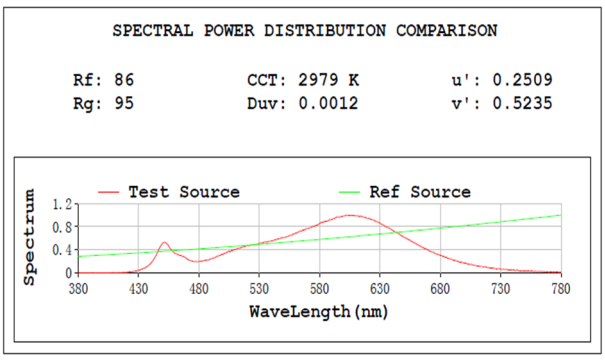
Spectrometry